

SUNNY-GII Plus

Sunny-GII *Plus*



TATSUNO

In Innovation, In Reliable Services

Sunny-GII


Plus

RELIABLE

JAPAN QUALITY DISPENSER



■ **BLUE LED DISPLAY** Long-lasting. A fine display uses-visibility bright blue LED back light.

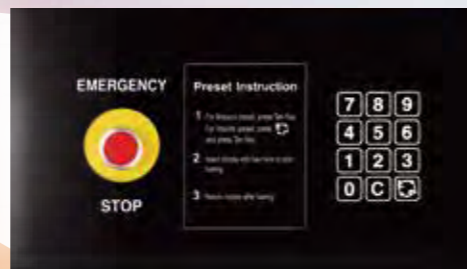

■ **WINDOW and DISPLAY**
Standard - equipped with user-friendly keypad.



■ **NEW CURVED DESIGN**

GLOBAL STANDARD COMPONENTS

- Meet OIML standards and achieving optimum balance of excellent performance economically
- Compact body fits into narrow spaces



■ Gear Pump Type



■ 4-Piston flow meter



LIST OF FUNCTION AND MODELS



■ Dimension




■ Type 1111

- P 1 pump
- N 1 nozzle
- C 1 counter
- M 1 simultaneous



■ Type 1222

- 1 pump P
- 2 nozzle N
- 2 counter C
- 2 simultaneous M

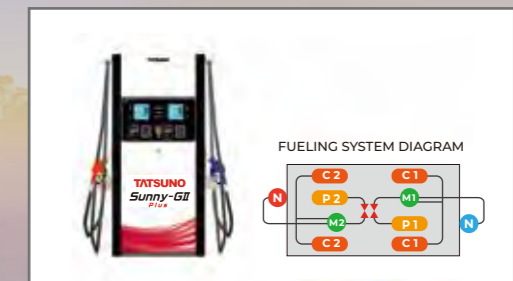

■ Type 2222

- P 2 pump
- N 2 nozzle
- C 2 counter
- M 2 simultaneous

SUPPORTED BY FULL RANGE OF OPTIONS

- Non-resettable electromagnetic totalizer
- Emergency stop switch
- Double swivel
- Emergency shut-off valve (Shear valve)
- High-speed : 60 L/min
- Maximum speed : 80 L/min
- Sight glass
- Safety coupling
- Washable filter
- Top gallery panel

Specification GII Plus

Delivery Speed	Standard speed (Gasoline/Diesel) : 40 - 45 L/min
	High speed (Gasoline/Diesel) : 50 - 60 L/min
	Max speed (Diesel) : 70 - 80 L/min
	Delivery speed is fluctuate by installed components (Suction type)
	Delivery speed is fluctuate by STD and installed components (Submersible type)
Suction Head (Suction Type)	4 m (Gasoline column) / max 5 m (Diesel column)
Measuring Accuracy	± 0.25%
Display Type	Micro-computer type electronic counter at non-hazardous area
Price and Volume Indication	Price : 7 digits 0.01
	Volume : 7 digits 0.01
	Unit price : 5 digits 0.01
	Decimal places are possible to change according to each local specification
Size of Display Character	Price readout : 30H x 120W mm
	Volume readout : 30H x 120W mm
	Unit price readout : 24H x 98W mm
Color of Display Character	Black characters with BLUE backlight. (LCD)
Reset Device	Automatic reset in nozzle holster
Totalizer	Electronic : 10 digits 99 999 999.99 liters (Displayed on counter)
Daily Totalizer	Electronic : 10 digits 99 999 999.99 liters (Displayed on counter)
Keypad	Volume and amount preset can be set up from dispenser.
	Numeric key only
Over Voltage Protector	Provided
Self-diagnosis	Provided
Initial-setting Method	By using keypad
Pulser	0.01 L/pulse
Flow Control Valve	2-stage valve
Motor (Suction Type)	Explosion-proof, continuous duty motor with over-load protection
	1-phase 3/4 HP (220 to 240 V) 1-phase 1 HP (220 to 240 V) 3-phase 1 HP (380 V)
Filter (Submersible Type)	Paper filter
Hose	3/4" x 15 ft
Nozzle	3/4" automatic stop nozzle
Swivel	Single swivel

Note: The delivery speed of the pump may change due to the following condition if it is used beyond Tatsuno's installation and operational instructions :

1. Size and length of hose
2. Size and type of nozzle / swivel
3. Oil products, suction condition, and local piping condition

Specifications are subject to change with or without prior notice.



International Marketing Dept.

1-1, Kasama 4-Chome, Sakae-ku, Yokohama, 247-8570, Japan
 Telephone:+81-(0)50-9000-0555 Fax:+81-(0)45-893-4680

<https://tatsuno-corporation.com/en/>

